



FastRack 510™ Spec Sheet

The *Simple* Solar Racking Solution for Flat Roof & Ground Mount PV.

- Quick to Ship, Stage and Install
- 5°, 6°, 10° mounting solution
- No Assembly Required, Installs in 5-10 min/panel
- High GCR (min 8" IR Spacing)
- Universally compatible with all framed modules
- Ballasted, anchored and hybrid
- Round edges and low point loads
- One size bolt with all top down connections
- Injection molded UV rated Nylon6
- PE stamp engineering and ballast layout services available
- Up to 1.5 MW ships in a 53' trailer
- UL 2703, 3741, & FEOC
- 100% Recyclable
- Made in the U.S.A.


Sollega.com



info@sollega.com



415.648.1299

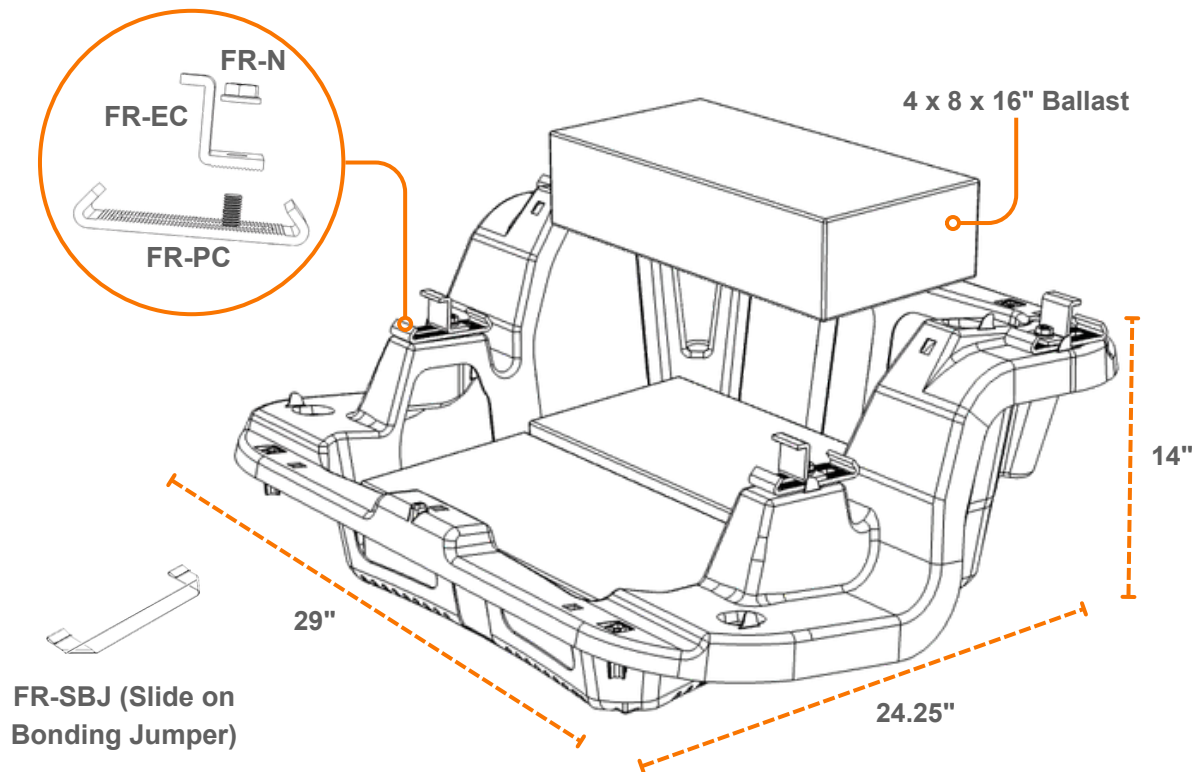

Tilt Angle	5°	6°	10°
Row Spacing	10" (254mm)	8" (203mm)	13" (330mm)
Leading Edge	8" (203mm)	8" (203mm)	5.3" (135mm)
Compatible Modules	Rated up to 46" (1168.4mm) in Width		
Weight		4.5lbs (2kg)	
Ballast Requirements	4" x 8" x 16" Roof Paver (31.5 lbs each) based on ASTM Designation C1491-01a.		
Material	Injection Molded UV rated Nylon 6		
Module Orientation		Landscape	
Wind Load Criteria	Meets ASCE 7-16 up to 185 MPH		
UL Certification	UL 1703: Class 'A' Type 1,2,3,29 Modules, UL2703,UL3741		
Warranty	25 Year Limited Warranty		
Dimensions	(LxWxH) 24.25 x 29 x 14" 616 x 737 x 356mm		
Disassembly	Simple disassembly and 100% recyclable content		
Patent	Utility Patent #9,831,817 Design Patent #D800,055		