


Ground Mount Prep Sheet

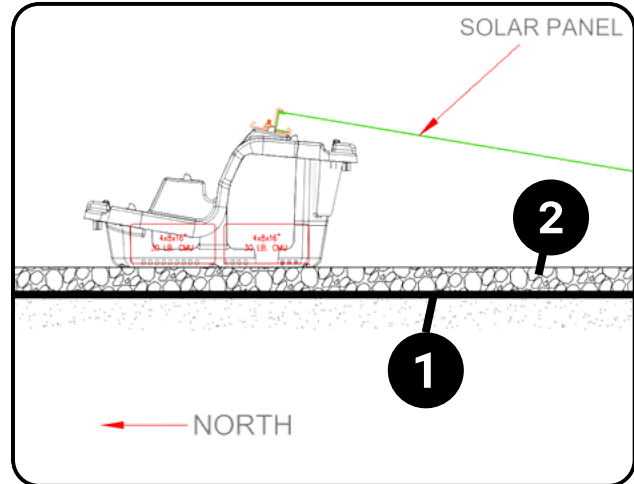

Suggested Ground Preparation for Proper Installation of Sollega FR510 Racking Units.

- **All sites** should first be verified by a civil engineer to ensure proper drainage and stability.
- **Clear the site:** Clear site of all vegetation and treat with herbicide.
- **Level the ground:** Grade the site to be within a 0–7° slope.
- **[1] Geotextile layer:** Install a geotextile layer across the site to prevent organic growth ([example here](#)).
- **[2] Aggregate Layer:** Put down a layer of aggregate or road base for drainage.